



SSCRA1D1 THRU SSCRA7D1

1.0Amp Standard Surface Mounted Rectifiers

● Features

- ✧ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ✧ Construction utilizes void-free molded plastic technique
- ✧ Low reverse leakage
- ✧ High forward surge current capability
- ✧ High temperature soldering guaranteed 260°C/10 seconds at terminals

● PIN configuration




SMF/SOD-123FL



Circuit Diagram

● Mechanical Data

- ✧ Case: Molded plastic body
- ✧ Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- ✧ Polarity: Polarity symbol marking on body
- ✧ Mounting Position: Any



Marking

(A7: SSCRA7D1 Marking Code)

● Absolute maximum rating (T_A=25°C unless otherwise noted)

Parameter	Symbol	SSCR							Unit
		A1D1	A2D1	A3D1	A4D1	A5D1	A6D1	A7D1	
Maximum Peak Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current	I _{F(AV)}	1.0							A
Non-repetitive Peak Forward Surge Current @t=8.3ms	I _{FSM}	30.0							A
Max Instantaneous Forward Voltage at 1.0A	V _F	1.0							V
Maximum DC Reverse Current T _a = 25 °C at Rated DC Blocking Voltage T _a =125 °C	I _R	2.0 200							μA
Typical Junction Capacitance (Note1)	C _J	18.0							pF
Typical Thermal Resistance	R _{qJA}	85.0							°C/W
Operating Temperature	T _J	-55 ~ +150							°C
Storage Temperature	T _{STG}	-55 ~ +150							°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V DC.



● Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

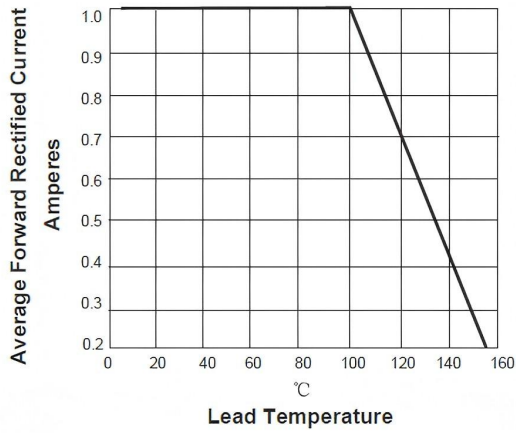


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

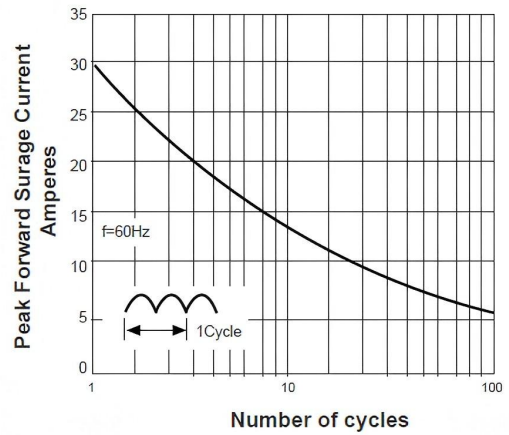


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS


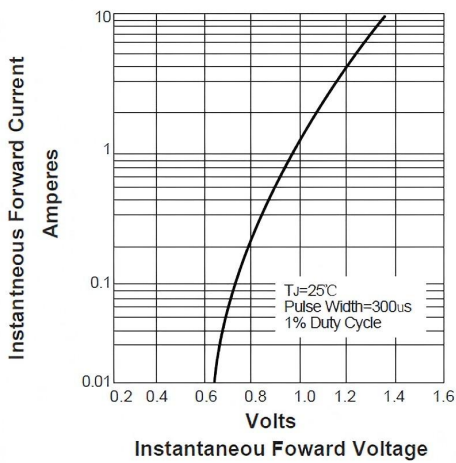


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS



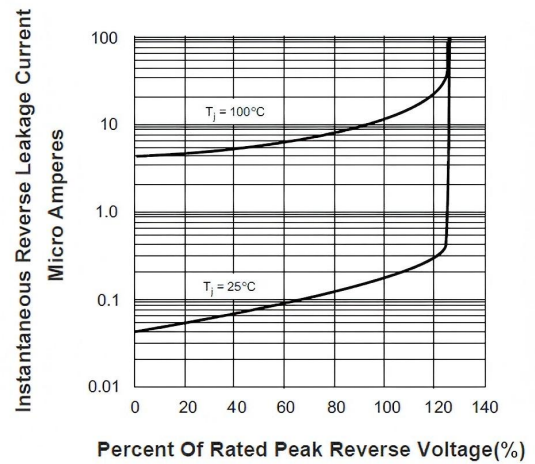

- **Package Information**


Ordering Information

Device	Package	Marking	Qty per Reel	Reel Size
SSCRA1D1	SMF/SOD-123FL	A1	3000	7 Inch
SSCRA2D1	SMF/SOD-123FL	A2	3000	7 Inch
SSCRA3D1	SMF/SOD-123FL	A3	3000	7 Inch
SSCRA4D1	SMF/SOD-123FL	A4	3000	7 Inch
SSCRA5D1	SMF/SOD-123FL	A5	3000	7 Inch
SSCRA6D1	SMF/SOD-123FL	A6	3000	7 Inch
SSCRA7D1	SMF/SOD-123FL	A7	3000	7 Inch

Mechanical Data


Case: SMF/SOD-123FL

Case Material: Molded Plastic. UL Flammability

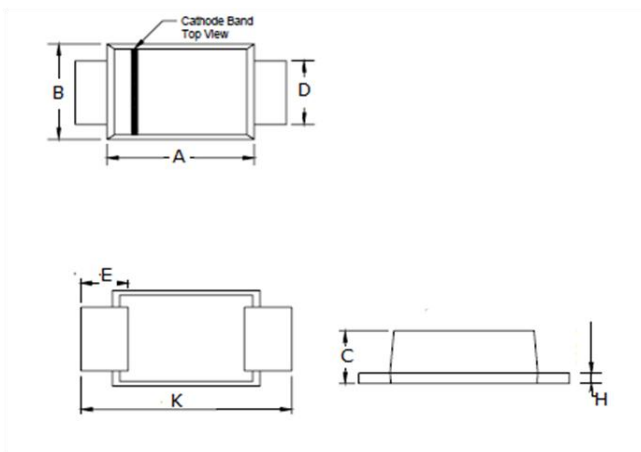

Dim	Millimeters	
	Min	Max
A	2.50	2.90
B	1.50	1.90
C	0.095	1.20
D	0.70	1.20
E	0.35	0.85
H	0	0.1
K	3.40	3.90

Recommended Pad outline

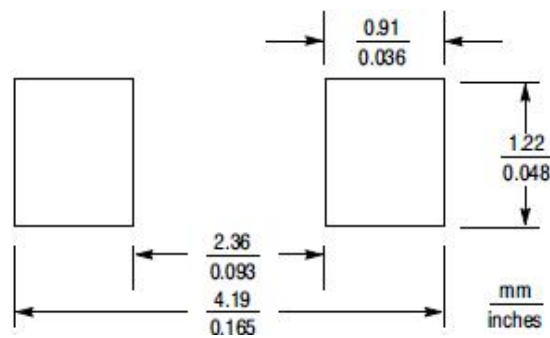



DISCLAIMER

SSCSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. SSCSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICIENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.

OUR PRODUCT SPECIFICATIONS ARE ONLY VALID IF OBTAINED THROUGH THE COMPANY'S OFFICIAL WEBSITE, CRM SYSTEM, OR OUR SALES PERSONNEL CHANNELS. IF CHANGES OR SPECIAL VERSIONS ARE INVOLVED, THEY MUST BE STAMPED WITH A QUALITY SEAL AND MARKED WITH A SPECIAL VERSION NUMBER TO BE VALID.