




SSCHP0080SB

1-line Bidirectional Thyristor Surge Suppressors

● Description

SSCHP0080SB is designed to protect baseband equipment such as modems, line cards, CPE and DSL equipments from damaging overvoltage transients. The series provide a robust peak surge current capability which enables equipments to comply with global regulatory standards.

● PIN configuration




SMB/DO-214AA

● Features

- ✧ (SMB)DO-214AA Package
- ✧ Low on-state voltage
- ✧ Low capacitance
- ✧ Low leakage current
- ✧ High reliability
- ✧ Fails short circuit when surged in excess of ratings
- ✧ Quick response to surge voltage (ns Level)
- ✧ Does not degrade in capability after multiple surge events within limit.



Circuit diagram

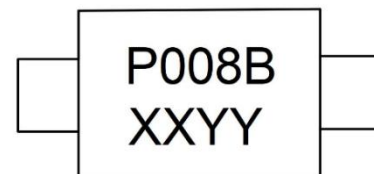

Marking

(XXYY: Internal Traceability Code)

● Applications

- ✧ Audio/Video line
- ✧ Network and telecom
- ✧ Data lines and security systems
- ✧ Serial ports


● Mechanical Characteristics

- ✧ Case Material: "Green" Molding Compound.
- ✧ UL Flammability Classification Rating 94V-0
- ✧ Device meets MSL 3 requirements
- ✧ Terminal Connections: See Diagram Below
- ✧ Marking Information: See Below



- **Electronic Parameter**

Symbol	Parameter
V_{DRM}	Peak Off-state Voltage
V_S	Switching Voltage
V_T	On-state Voltage
I_{DRM}	Leakage Current
I_S	Switching Current
I_T	On-state Current
I_H	Hold Current
C_O	Junction Capacitance
I_{PP}	Maximum Reverse Peak Pulse Current

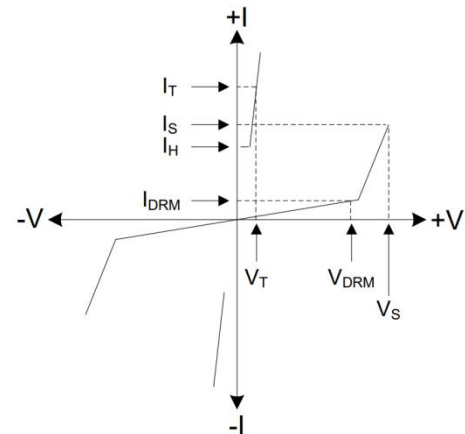

- **Absolute maximum rating @ $T_A=25^{\circ}\text{C}$**

Parameter	Symbol	Value	Units
Peak Pulse Voltage (10/700us)	V_{PP}	4	kV
Peak Pulse Current (10/1000us)	I_{PP}	80	A
Peak Pulse Current (8/20us)	I_{PP}	250	A
Storage Temperature	T_{STG}	-40/+150	$^{\circ}\text{C}$
Operating Temperature	T_J	-40/+125	$^{\circ}\text{C}$

- **Electrical Characteristics @ $T_A=25^{\circ}\text{C}$**

Part Number	V_{drm} @ $I_{drm}=1\mu\text{A(V)}$	$I_{drm@V}$ $_{drm}(\mu\text{A})$	V_S @100kV/ S (V)	I_S (mA)	V_t @ $I_t=2.2\text{A}$ (V)	I_t (A)	I_h (mA)	C_o @1MHz,2V bias (pF)
	Min.	Max.	Max.	Max.	Max.	Max.	Min.	Typ.
SSCHP0080SB	6	5	15	800	4	2.2	30	40

Note:

ALL measurements are made at an ambient temperature of 25°C .


temperature range. V_{DRM} is measured at I_{DRM} .

Off-state capacitance(C_o) is measured at 1 MHz with a 2V bias.


V_S is measured at 100kV/S.




- Typical Performance Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise Specified)

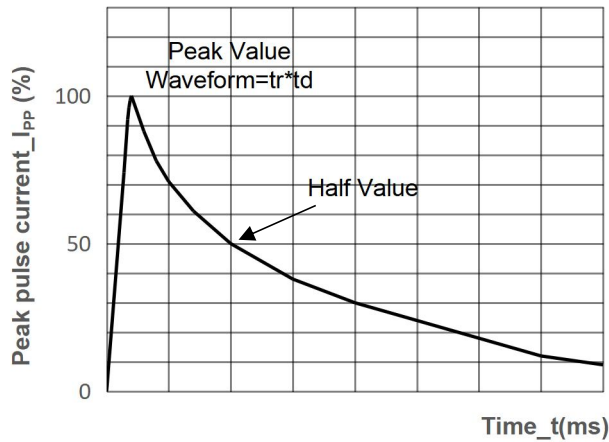

Tr*Td Pulse Waveform

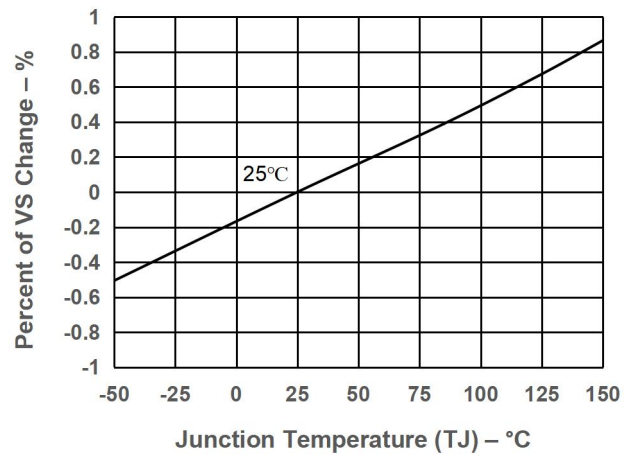

Normalized Vs Change vs. Junction Temperature

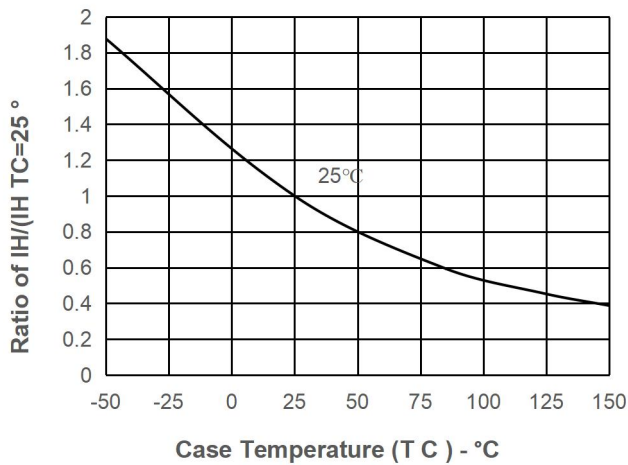

Normalized DC Holding Current vs. Case Temperature



- Package Information


Ordering Information

Device	Package	Qty per Reel	Reel Size
SSCHP0080SB	(SMB)DO-214AA	3000	13 Inch

Mechanical Data


Case: (SMB)DO-214AA

Case Material: Molded Plastic. UL Flammability

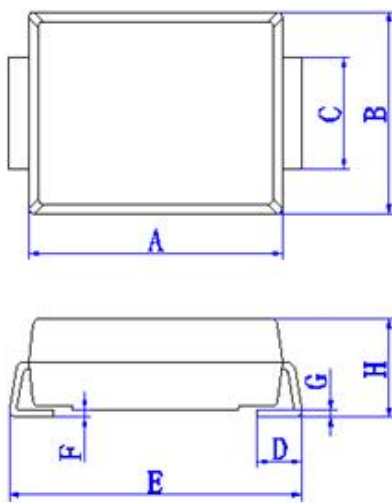

DIM	Millimeters	
	Min.	Max.
A	4.22	4.70
B	3.40	3.94
C	1.90	2.1
D	0.90	1.42
E	5.21	5.59
F	0.00	0.23
G	0.15	0.25
H	1.95	2.60

Recommended Pad outline (Unit: mm)

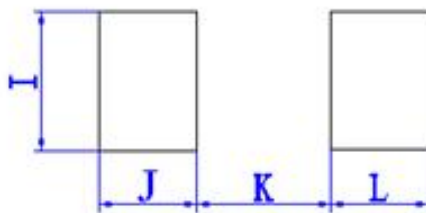

DIM	Millimeters	
	Min.	Max.
I	2.20	/
J	2.1	/
K	/	2.74
L	2.1	/



DISCLAIMER

SSCSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. SSCSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.

OUR PRODUCT SPECIFICATIONS ARE ONLY VALID IF OBTAINED THROUGH THE COMPANY'S OFFICIAL WEBSITE, CRM SYSTEM, OR OUR SALES PERSONNEL CHANNELS. IF CHANGES OR SPECIAL VERSIONS ARE INVOLVED, THEY MUST BE STAMPED WITH A QUALITY SEAL AND MARKED WITH A SPECIAL VERSION NUMBER TO BE VALID.